

GE Drive Systems

INSTRUCTIONS

36B605594ABG01
BALUN ASSEMBLY

7V11CBA Option Kit

IMPORTANT INFORMATION

CAUTION: To ensure proper operation of the QIII DC Controller, these instructions must be followed for proper installation and set-up of this Option Kit.

These instructions do not purport to cover all details or variations in equipment nor to provide for every possible contingency to be met in connection with installation, operation or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's purposes, the matter should be referred to General Electric Company

SAFETY PRECAUTIONS

WARNING - SHOCK AND BURN HAZARD:

Always disconnect power to the drive before performing any work on drive components. Failure to do so may cause serious injury to personnel and damage to the drive or the driven machinery.

NOTE: *Read all WARNINGS, CAUTIONS and NOTES in the QIII DC Controller Instruction Book (GEK-45167) prior to installing this Option Kit.*

NOTE: *Read and heed all WARNING, CAUTION, and NOTE labels posted on the equipment prior to installing this Option Kit.*

KIT DESCRIPTION AND CONTENTS

DESCRIPTION:

This Balun Option Kit provides two ferrite cores for routing wiring through to reduce noise on digital tachometer signals to the controller.

CONTENTS:

The kit contains the following components (in addition to these instructions):

Component	Part Number	Qty.
Balun Assembly	36B605594ABG01	1
Mtg. Hardware	----	--

NOTE: *If the 4TB Terminal Board Option Kit (7V11CTB) is also the be installed on the controller, the Balun assembly should be placed onto the appropriate mounting screws* ***prior*** *to installing the 4TB Terminal Board Option Kit (this option kit uses two of the same screws as 4TB option kit).*

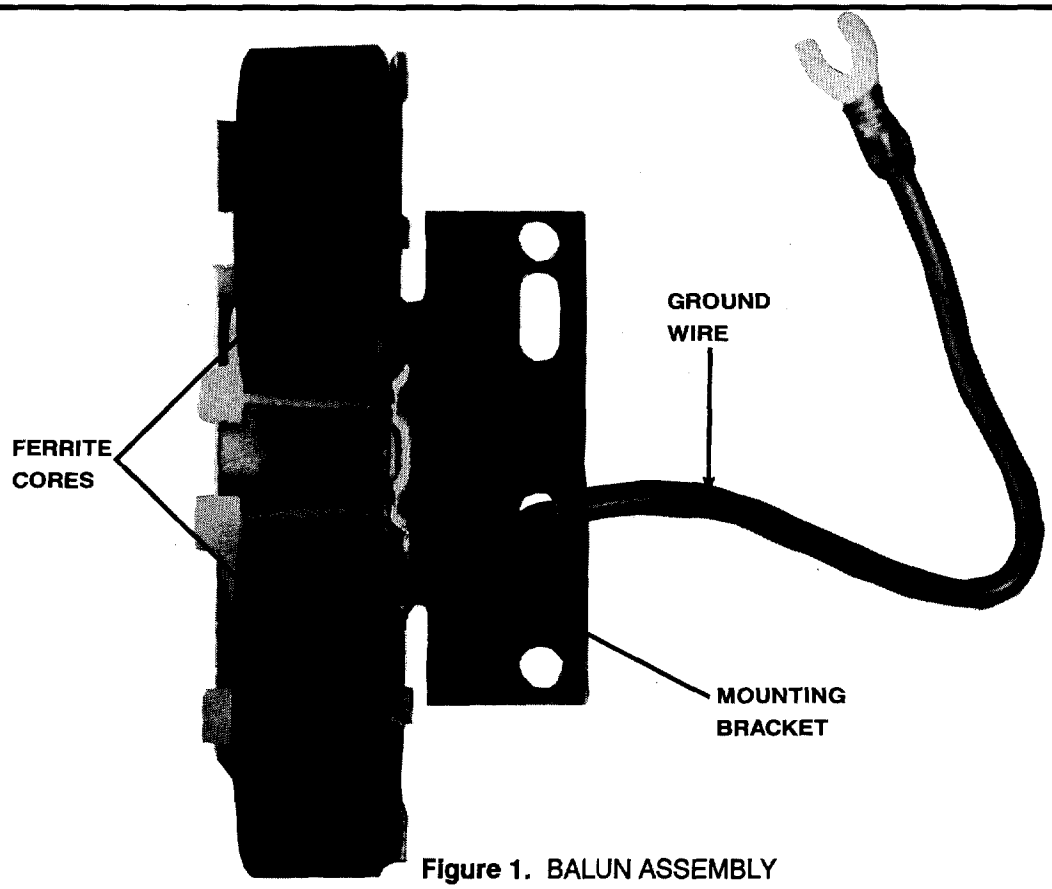


Figure 1. BALUN ASSEMBLY

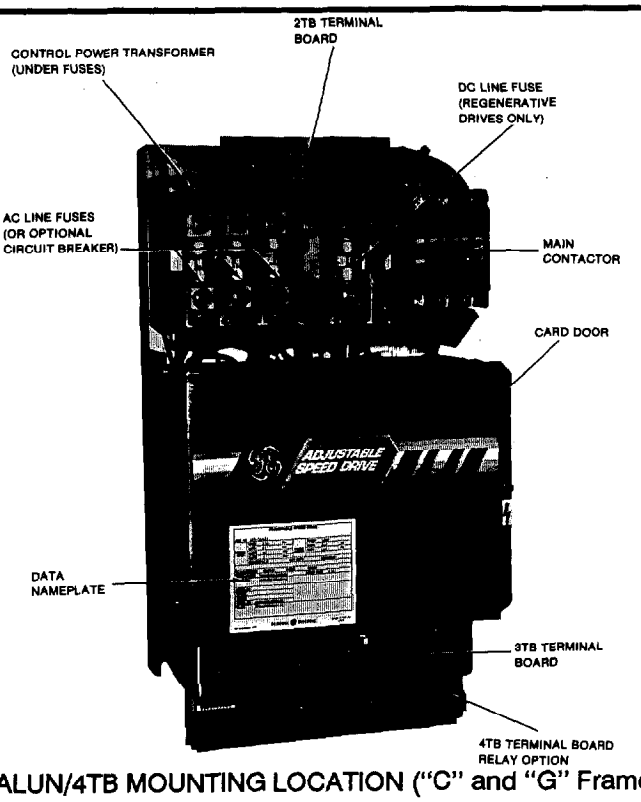


Figure 2. BALUN/4TB MOUNTING LOCATION ("C" and "G" Frames)

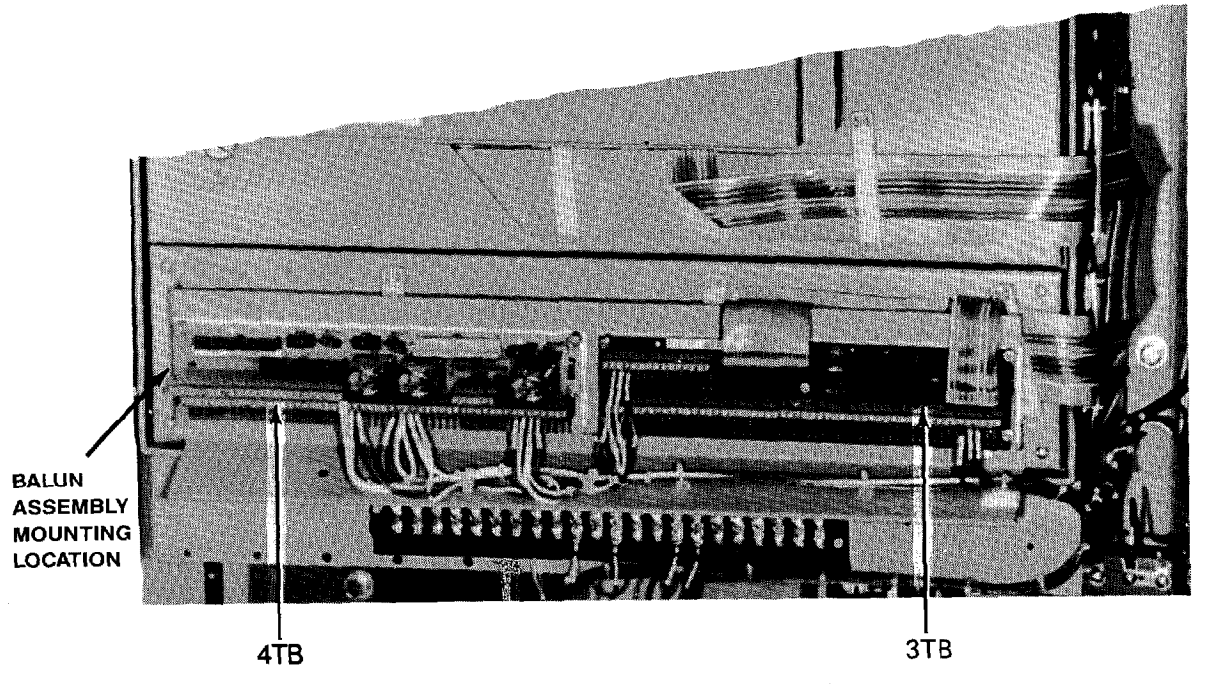


Figure 3. BALUN/4TB MOUNTING LOCATION ("D" Frame)

KIT INSTALLATION PROCEDURE

WARNING - SHOCK AND BURN HAZARD:
Always disconnect power to the drive before performing any work on drive components. Failure to do so may cause serious injury to personnel and damage to the drive or the driven machinery.

1. Verify that power to the controller that the option kit is to be installed is OFF.

NOTE: *If 4TB Terminal Board is* ***already installed*** *on the mounting screws, it must be removed in order to install the balun assembly. Remove 4TB if necessary as follows:*

a. Loosen the four mounting nuts and remove the mounting nut and washer from each mounting screw.

b. Slide 4TB Terminal Board and the insulation barrier off from the mounting screws.

c. Slide the appropriate mounting standoffs off from the mounting screws (right side pair of screws for "G" and "C" frames, left side pair of screws for "D" frames).

2. Slide the balun assembly onto the appropriate mounting screws (already installed on drive; same screws as used for mounting 4TB).
   -- Right side pair of screws for "G" and "C" frames.
   -- Left side pair of screws for "D" frames.

NOTE: ***If necessary, remount 4TB*** *Terminal Board card to mounting screws as follows:*

a. Replace mounting standoffs over each of the mounting screws from which previously removed.

b. Place the insulation barrier onto the four mounting screws.

c. Orient 4TB Terminal Board card with termination points towards bottom and place onto the four mounting screws.

d. Slide a washer over each mounting screw and thread a nut onto each mounting screw.

e. Tighten all mounting nuts. (Balun assembly installation is ***complete*** *at this point;* ***disregard*** *steps 3 and 4 of following procedure).*

3. Remove mounting hardware from shipping bag and slide a washer over each of the two mounting screws that balun assembly is installed on and thread a nut onto each mounting screw.

4. Tighten both mounting nuts.

5. Connect the Balun Assembly ground wire to one of the multiple ground screws on the enclosure near the Balun mounting point.

6. Route wiring through each ferrite core of balun assembly as required.



GE Drive Systems

GEK-45163 (9/90)

General Electric Company
GE Drive Systems
1100 Lawrence Parkway
Erie, PA 16531